
## Superglass Matte

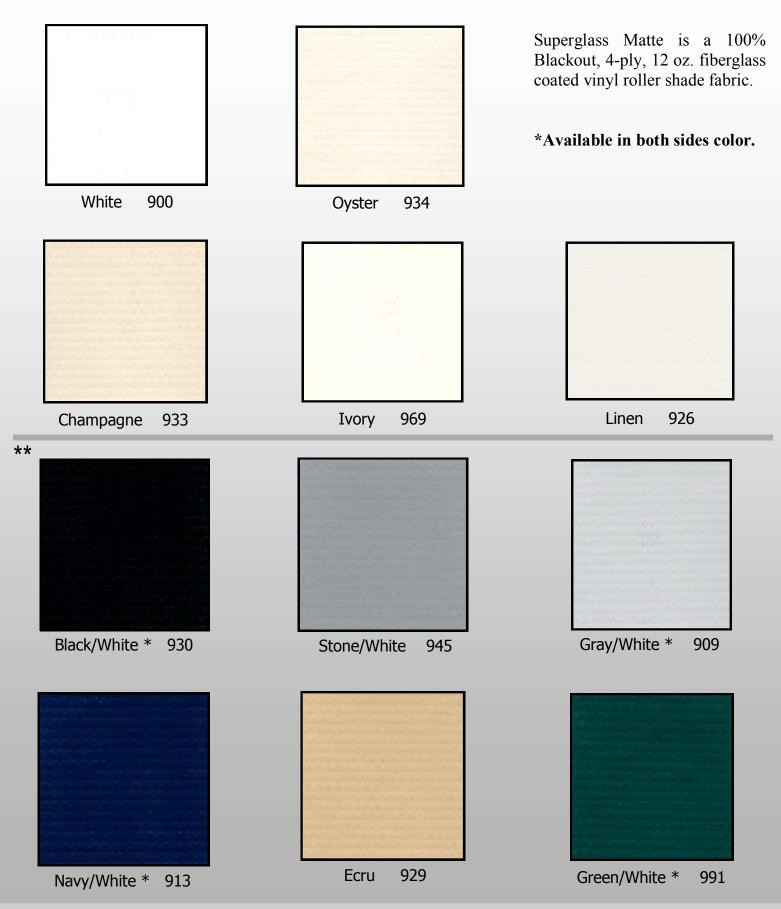

<sup>\*\*</sup>All colors below this line are more expensive and require a re-quote.

## Superglass Matte

## Fabric Specifications

Construction: 4-Ply Laminated Fiberglass, 1-Ply Fiberglass/

3 Ply PVC (25%Fiberglass/75% PVC)

Finished Weight: 12 oz. per square yard

Fabric Thickness: .01-.013 inches

Opacity: 100% Blackout

Breaking Strength: 240 lbs. Warp Direction,

960 lbs. Fill Direction

Tear Strength: 1,700 Grams Warp Direction

1,800 Grams Fill Direction

Flame Resistance: - US Federal Govt. Spec. CCC-C0521E

NFPA No. 701 Small ScaleBoston Fire Dept. BFD 1 X-1

- California Fire Marshal Section 13115

Adhesion: PVC Films Inseparable

Wash Ability: Material can be washed on both sides

with mild 5% detergent solution

Usage: Roller Shade & Vertical Blind